## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade	mark: FOREVER LIGHT
--------------------------	---------------------

Supplier's address: R&D Department, Krakowska 119, 50-428 Wrocław Wrocław Dolnośląskie, PL

Model identifier:	RTV003616
-------------------	-----------

_	•			
IVNE	Λt	light	source:	
IVE	<b>U</b> I	115116	Jour cc.	


Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	3x0,75mm		
(or other electric interface)			
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## **Product parameters**

Product parameters				
Parameter		Value	Parameter	Value
	General product parameters:			
Energy consur mode (kWh/10 up to the neare	00 h), rounded	30	Energy efficiency class	G
dicating if it refe a sphere (360°)	s flux (фuse), ineers to the flux in, in a wide cone arrow cone (90º)	2 400 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	6 000
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	30,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	-
(P <sub>net</sub> ) for CLS, 6	candby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	81
Outer dimen-	Height	160	Spectral power dis-	See image
sions without	Width	121	tribution in the	in last page
separate con- trol gear, light- ing control	Depth	25	range 250 nm to 800 nm, at full-load	

parts and non- lighting con- trol parts, if any (millime- tre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordi-	0,306
		nates (x and y)	0,328
Parameters for LED and OLED lig	ht sources:		
R9 colour rendering index value	-4	Survival factor	-
the lumen maintenance factor	-		
Parameters for LED and OLED m	ains light sources:		
displacement factor (cos φ1)	0,93	Colour consistency in McAdam ellipses	6
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	_(b)	If yes then replace- ment claim (W)	-
Flicker metric (Pst LM)	0,1	Stroboscopic effect metric (SVM)	0,1

(a)'-': not applicable; (b)'-': not applicable;

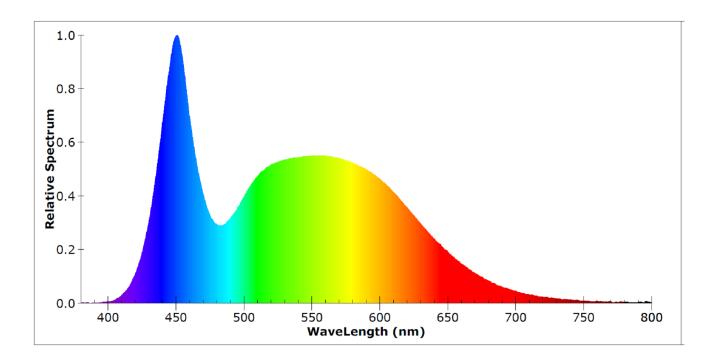

## Model placed on the Union market from 08/12/2020



**EPREL registration number:** 721486 https://eprel.ec.europa.eu/qr/721486

Supplier: TELFORCEONE S A (Manufacturer) Website: WWW.TELFORCEONE.PL

**Customer care service:** 

Name: R&D Department Website: www.telforceone.pl

Email: marcin.kwolek@tfo.pl Phone: +48 71 327 20 00

Address:

Krakowska 119 50-428 Wrocław

Poland