

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: TP-Link

Supplier's address: TP-Link Enterprises Netherlands B.V., Archimedesbaan 18e, 3439ME Nieuwegein, NL

Model identifier: Tapo L530E

Type of light source:

| | | | |
|-----------------------------------------------------|-----|---------------------------------|------|
| Lighting technology used: | LED | Non-directional or directional: | NDLS |
| Light source cap-type (or other electric interface) | E27 | | |
| Mains or non-mains: | MLS | Connected light source (CLS): | Yes |
| Colour-tuneable light source: | Yes | Envelope: | - |
| High luminance light source: | No | | |
| Anti-glare shield: | No | Dimmable: | Yes |

Product parameters

| Parameter | Value | Parameter | Value |
|-----------|-------|-----------|-------|
|-----------|-------|-----------|-------|

General product parameters:


| | | | |
|------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------|
| Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer | 9 | Energy efficiency class | F |
| Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°) | 843 in Sphere (360°) | Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set | 2500...6500 |
| On-mode power (P_{on}), expressed in W | 9,0 | Standby power (P_{sb}), expressed in W and rounded to the second decimal | 0,14 |
| Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal | 0,16 | Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set | 82 |
| Outer dimensions without separate control gear, light- | Height | 60 | Spectral power distribution in the range 250 nm to 800 nm, at full-load |
| | Width | 60 | |
| | Depth | 115 | |
| | | | See image in last page |

| | | | | |
|-------------------------------------------------------------------------------------------------------------------------|------|---------------------------------------|----------------|--|
| ing control parts and non-lighting control parts, if any (millimetre) | | | | |
| Claim of equivalent power ^(a) | Yes | If yes, equivalent power (W) | 60 | |
| | | Chromaticity coordinates (x and y) | 0,458 0,410 | |
| Parameters for LED and OLED light sources: | | | | |
| R9 colour rendering index value | 10 | Survival factor | 1,00 | |
| the lumen maintenance factor | 0,92 | | | |
| Parameters for LED and OLED mains light sources: | | | | |
| displacement factor (cos ϕ_1) | 0,55 | Colour consistency in McAdam ellipses | 2 | |
| Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage. | -(b) | If yes then replacement claim (W) | - | |
| Flicker metric (Pst LM) | 0,2 | Stroboscopic effect metric (SVM) | 0,1 | |


(a) : not applicable;

(b) : not applicable;

Model: Tapo L530E

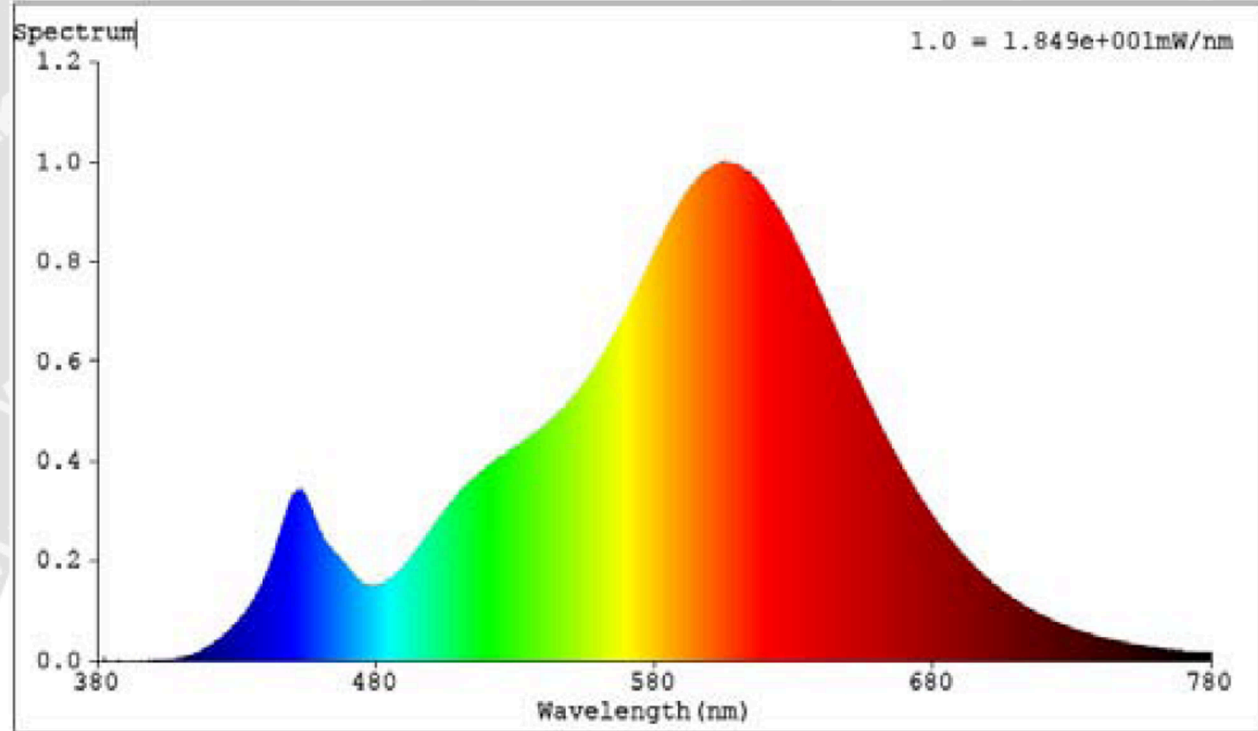

Model placed on the Union market from 01/01/2020



EPREL registration number: 857371

<https://eprel.ec.europa.eu/qr/857371>

Supplier: TP-link Enterprises Netherlands B.V. (Importer)

Website:

Customer care service:

Name: TP-Link Enterprises Netherlands B.V.

Website:

Email: admin.nl@tp-link.com

Phone: +31306036568

Address:

Archimedesbaan 18e

3439ME Nieuwegein

Netherlands