

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** DPM

**Supplier's address:** Centrala, Harcerska 34, 64-600 Oborniki Kowanówko wielkopolskie, PL

**Model identifier:** STP-12W-30B

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	DLS
Light source cap-type (or other electric interface)	terminal		
Mains or non-mains:	MLS	Connected light source (CLS):	Yes
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No


## Product parameters

Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	12	Energy efficiency class	G
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	753 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	4 000
On-mode power ( $P_{on}$ ), expressed in W	12,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,20
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	0,20	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	83
Outer dimensions without separate control gear, lighting control	Height	300	Spectral power distribution in the range 250 nm to 800 nm, at full-load
	Width	60	
	Depth	60	
			See image in last page

parts and non-lighting control parts, if any (millimetre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,380 0,380
<b>Parameters for directional light sources:</b>			
Peak luminous intensity (cd)	4 721	Beam angle in degrees, or the range of beam angles that can be set	24
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	52	Survival factor	-
the lumen maintenance factor	-		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,72	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0,8	Stroboscopic effect metric (SVM)	0,3


(a) '-': not applicable;

(b) '-': not applicable;

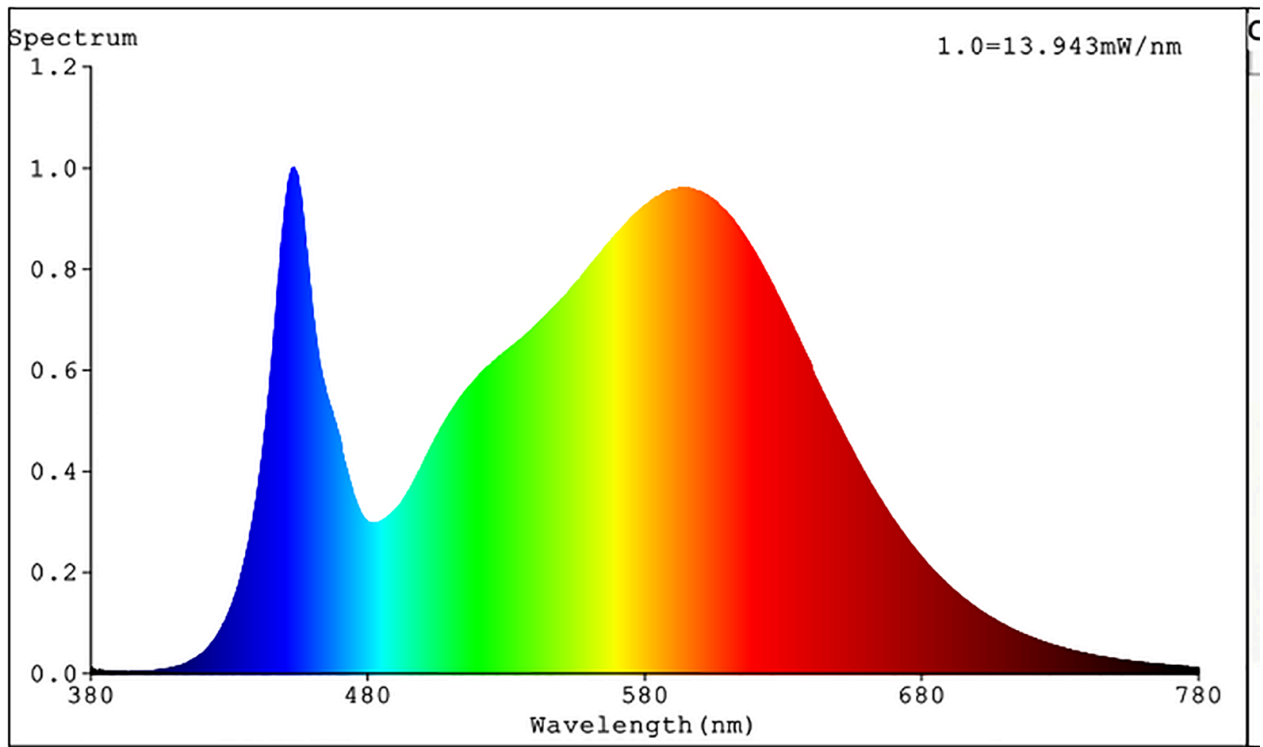

Spectral Distribution

Model placed on the Union market from 09/08/2019



**EPREL registration number:** 770523

<https://eprel.ec.europa.eu/qr/770523>

**Supplier:** DPMSolid Limited Spółka komandytowa (Manufacturer)

**Website:** [www.dpm.eu](http://www.dpm.eu)

**Customer care service:**

**Name:** Centrala

**Website:** [www.dpm.eu](http://www.dpm.eu)

**Email:** [info@dpm.eu](mailto:info@dpm.eu)

**Phone:** +48612965470

**Address:**

Harcerska 34  
64-600 Kowanówko  
Poland